

**BLOCKER**

FA 20 103 00A

OR

**LOREL**

FA 20 103 00B

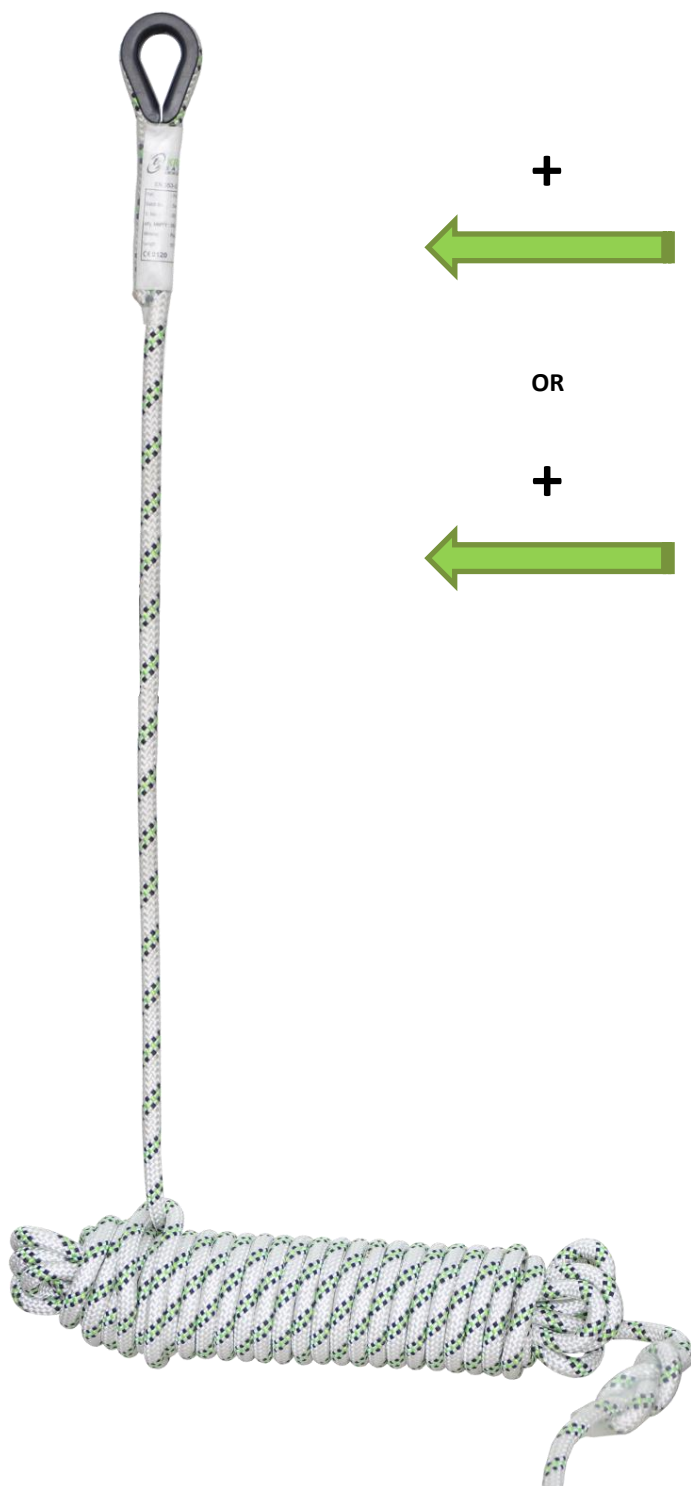

HS CODE
56090000
CARTON SIZE / PCS.
FA 20 103 10, FA 20 103 15 : 60 x 40 x 24 cm / 10
FA 20 103 20 : 40 x 40 x 24 cm / 5
FA 20 103 30 : 60 x 40 x 24 cm / 5
FA 20 103 40 : 80 x 40 x 24 cm / 5
FA 20 103 50 : 80 x 40 x 24 cm / 4
AET N°2777/10858-04/E03-02
AET N°2777/10860-03/E02-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.01
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 20 103 10	FA 20 103 15	FA 20 103 20	FA 20 103 30	FA 20 103 40	FA 20 103 50
LG.  KG	10 m	15 m	20 m	30 m	40 m	50 m
MAX. 140 KG (FA 20 103 00A) MAX. 100 KG (FA 20 103 00B)						
CE	EN 353-2:2002, EN 358:2018					
MAT.	 PA 11 mm					
R(kN)	15 kN					
+	FA 20 103 00A, FA 20 103 00B					
 Kg	1.50 kg	2.02 kg	2.55 kg	3.60 kg	4.65 kg	5.70 kg

LG.

 KG
 Longueur Poids maxi utilisateur
 Length Max. user weight
 Longitud Peso máximo del usuario
 Lunghezza Peso Max. dell'utente
 Länge Höchstgewicht des Benutzers

R(kN)
 Résistance (en kN)
 Strength (in kN)
 Resistencia (en kN)
 Resistenza (in kN)
 Belastbarkeit (in kN)

 PA 11 mm
 Corde tressée en polyamide, diamètre 11 mm
 Polyamide Kernmantle rope, dia. 11 mm
 Cuerda trenzada de poliamida, diámetro de 11 mm
 Corda intrecciata in poliammide, diametro 11 mm
 Geflochtenes Polyamidseil, Durchmesser 11 mm

+
 À utiliser avec
 To be used with
 Para usar con
 Ad essere utilizzato con
 Verwendet werden soll mit