

①





②



③



④

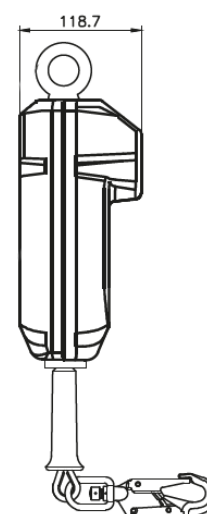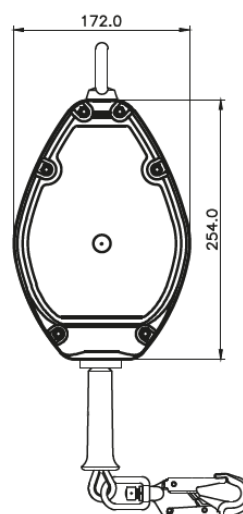

SLOW RETRACTION CABLE




II 2 G Ex h IIC T6 Gb



HS CODE
84798997
CARTON SIZE / PCS.
60 x 40 x 24 cm / 2
AET (EU) N° 2777/10832-03/E00-00 (KARAM)
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
Technical Report SPC0300208/2029
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
MODULE D FI14/14003.01
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 20 403 10B
LG. 	10 m
KG	140 KG
CE	EN 360:2002
MAT. 	Polyamide 6 - 30% fiber glass
	 STEEL Ø4.5 mm
	 ALU FA 50 201 22 / FA 50 221 17 with fall indicator
	x2
R(kN)	12 kN
	NO
+	CONSTANT WINDING SPEED = protection of internal mechanism EN 80079-36:2016, EN 80079-37:2016 (ATEX Zone 1)
	5.23 KG

LG.  Longueur Poids maxi utilisateur Length Max. user weight Longitud Peso máximo del usuario Lunghezza Peso Max. dell'utente Länge Höchstgewicht des Benutzers	MAT.  Matière carter / câble Material of casing / wire rope Material cárter / cable Material dei carter / cavo Material Gehäuse / Seil	 Matière connecteur haut / connecteur bas Material of top connector / bottom connector Material conector alto / conector bajo Materiale connettore alto / connettore basso Material oberes / unteres Verbindungselement
 Nombre d'émerillons Number of swivels Cantidad de eslabones giratorios Numero di tornichetti Anzahl der Wirbel	 Homologué pour le travail à proximité d'arêtes vives Approved for work near sharp edges Homologado para trabajo cerca de aristas vivas Omologato per lavoro in prossimità di spigoli vivi Zugelassen für Arbeiten in der Nähe scharfer Kanten	CONSTANT WINDING SPEED Rétraction à vitesse constante Constant winding speed Retracción de velocidad constante Avvolgimento a velocità costante Konstanter Geschwindigkeit aufrollt