




①





②



③



④

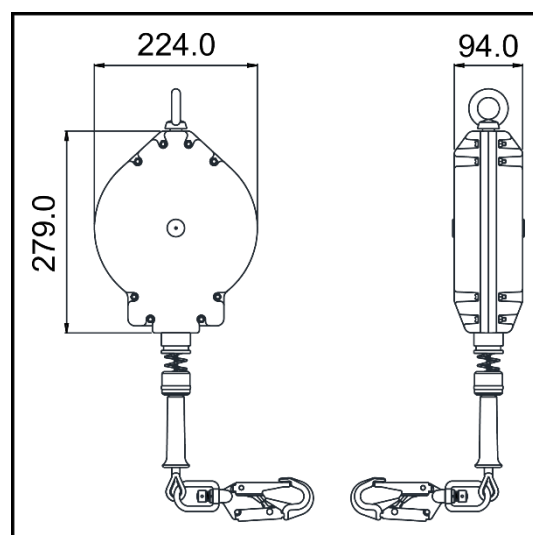

HS CODE
8428 90 90
CARTON SIZE / PCS.
60 x 40 x 24 cm / 2
AET N°2777/10836-02/E01-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland
ACKNOWLEDGEMENT OF RECEIPT N°3975/1/2018 (ATEX)
Technická Inšpekcia, a.s. N°1354 Trnavská cesta 56, 821 01 Bratislava, Slovenská Republika

REF.	FA 20 600 15 FA 20 600 20
LG.  KG	15 m 20.0 m ----- MAX. 140 KG
CE	EN 360:2002, ATEX Directive
MAT. 	  Ø 4.5 mm
	 FA 50 101 17 / FA 50 203 20 with fall indicator
	x2
R(kN)	12 kN
	NO
+ 	ATEX directive 2014/34/UE ( II2 G Exh IIC T6 Gb). 8.18 KG 8.58 KG

LG.

 KG
 Longueur Poids maxi utilisateur
 Length Max. user weight
 Longitud Peso máximo del usuario
 Lunghezza Peso Max. dell'utente
 Länge Höchstgewicht des Benutzers

MAT.

 Matière carter / câble
 Material of casing / wire rope
 Material cárter / cable
 Material dei carter / Cavo
 Material Gehäuse / Seil


 Matière connecteur haut / connecteur bas
 Material of top connector / bottom connector
 Material conector alto / conector bajo
 Materiale connettore alto / connettore basso
 Material oberes / unteres Verbindungselement


 Nombre d'émerillons
 Number of swivels
 Cantidad de eslabones giratorios
 Numero di tornichetti
 Anzahl der Wirbel


 Homologué pour le travail à proximité d'arêtes vives
 Approved for work near sharp edges
 Homologado para trabajo cerca de aristas vivas
 Omologato per lavoro in prossimità di spigoli vivi
 Zugelassen für Arbeiten in der Nähe scharfer Kanten