




HS CODE
56090000
CARTON SIZE / PCS.
60 x 40 x 24 cm / 50
AET (UE) N°2777/10788-03/E03-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.01
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 60 017 15
CE	EN 795:2012 Type B
	x 1
LG	1.5 m
MAT.	 45 mm ARAMID
R (kN) / MBS (kN)	18 kN / 30 kN
+	ISO 9150:1988, ISO 15025:2002
	0.38 KG

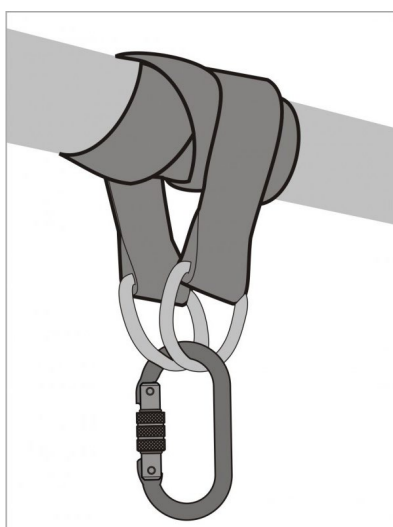

Nombre d'utilisateurs
 Number of users
Cantidad de usuarios
 Quantità di utilizzatori
Anzahl der Benutzer



Sangle pouvant résister jusqu'à des températures maximales de 371°C
 Strap that can withstand temperatures up to 371 °C
Correa que puede resistir temperaturas máximas de hasta 371 °C
 Cinghie possono resistere alle temperature di massimo 371°C
Gurt hitzeresistent bis maximal 371°C

R (kN) / MBS (kN)

Résistance statique (en kN) / Résistance à la rupture
 Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
 Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)



Sangle pouvant résister à des projections de métal en fusion
 Strap that can withstand splashes of molten metal
Correa que puede resistir proyecciones de metal en fusión
 Cinghie possono resistere alle proiezioni di metallo in fusione
Gurt beständig gegen Spritzer von Schmelzmetall