





II2 G Exh IIC T6 Gb

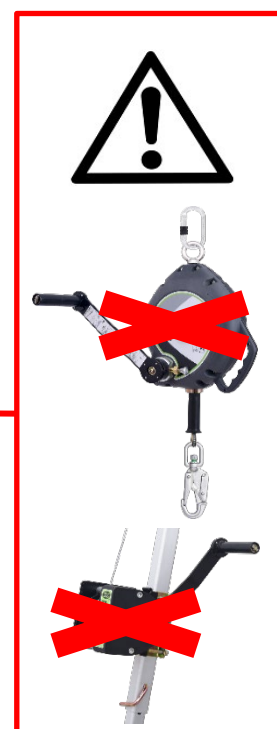

①

EN 795

x4

O x1




②



Quadpod bag (FA 60 108 00) included

HS CODE
76169990
CARTON SIZE / PCS.
147 X 29 X 26 cm / 1
AET (UE) N°2777/11660-03/E01-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.01
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 60 104 00
CE	EN 795:2012 Type B TS 16415:2013 Type B
	x2 (TS 16415:2013 Type B)
 1	500 KG
MAT.	ALU
DIM. 	1.21 m → 1.75 m
R (kN) / MBS (kN)	13 kN / 25 kN
	1.65 m → 2.30 m / 2.30 m → 3.20 m
+	Machinery Directive EN 80079-36:2016 EN 80079-37:2016
	15.56 KG



Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer

R (kN) / MBS (kN)


Résistance statique (en kN) / Résistance à la rupture
Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)



Charge maxi admissible sous tête
Max. allowable load under head
Carga máxima admisible bajo cabecsal
Peso massimale sotto la testa
Zulässige Höchstlast unter Kopf

DIM. 

Hauteur
Height
Altura
Altezza
Höhe



Distance entre 2 pieds / Diamètre du cercle circonscrit entre les 4 pieds
Distance between 2 feet / Diameter of the circumscribed circle between the 4 feet
Distancia entre 2 patas / Diámetro del círculo definido entre las 4 patas
Distanza tra due piedi / Diametro del cerchio circoscritto tra i 4 piedi
Abstand zwischen 2 Beinen / Durchmesser des Kreises zwischen den 4 Beinen