





EASYSAFEWAY 1

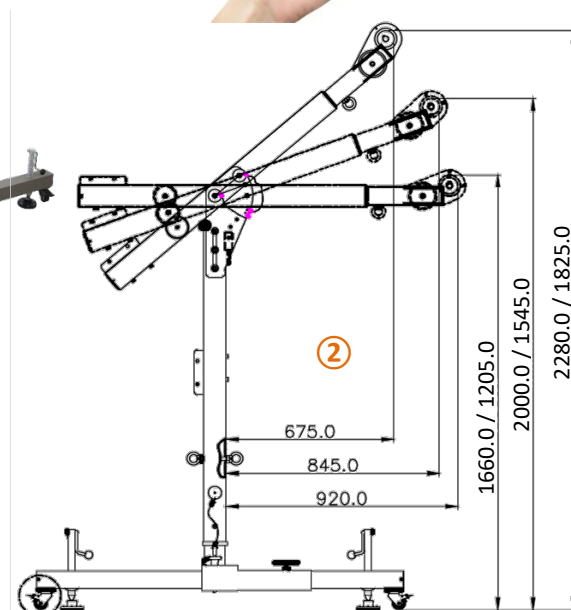

II2 G Exh IIC T6 Gb

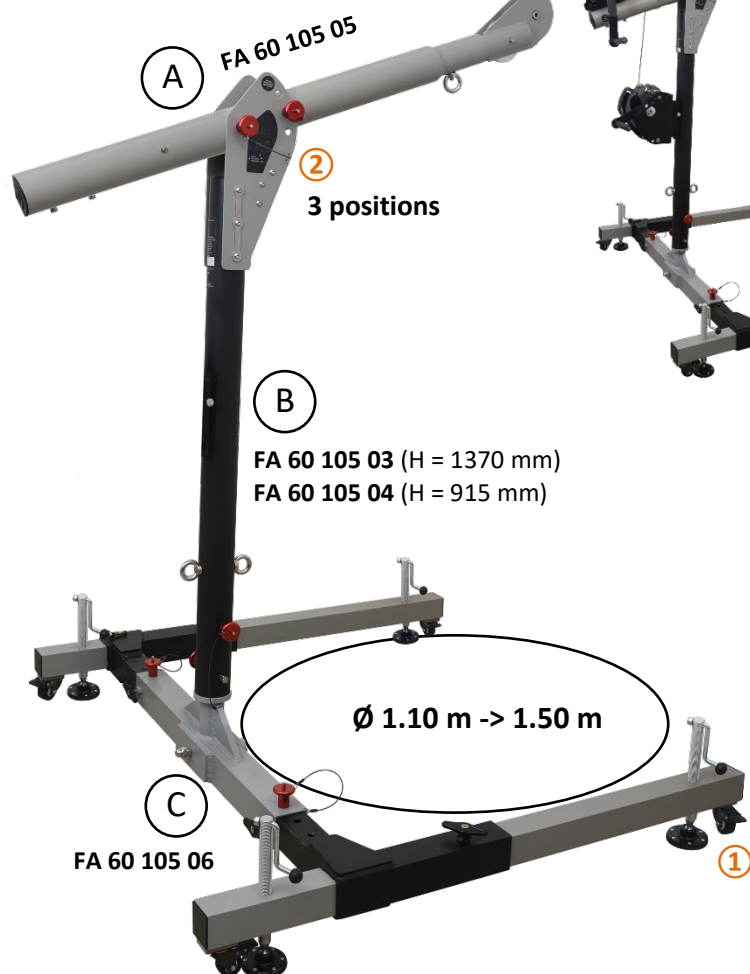

FA 60 105 00 =
FA 60 105 03
+ FA 60 105 05
+ FA 60 105 06

FA 60 105 07 =
FA 60 105 04
+ FA 60 105 05
+ FA 60 105 06

HS CODE
76169990
CARTON SIZE / PCS.
(A) FA 60 105 05 : 157 x 25 x 20 cm / 1 pc.
(B) FA 60 105 03 : 157 x 25 x 20 cm / 1 pc.
OR (B) FA 60 105 04 : 120 x 25 x 20 cm / 1 pc.
(C) FA 60 105 06 : 144 x 67 x 40 cm / 1 pc.
AET (UE) N°2777/16442-01/E01-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.01
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 60 105 00 FA 60 105 07	
	EN 795:2012 Type B	
	x1	
	500 KG	
MAT.		
DIM. 	3 positions : 1.66 m / 2.00 m / 2.28 m 1.20 m / 1.54 m / 1.82 m	
R (kN) / MBS (kN)	12 kN / 21 kN	
	Min. 1,10 m / Max. 1,50 m	
+	(1) Machinery Directive + EN 1808 (2) FA 60 022 01/02/11/12/13 (2) FA 60 105 01 + FA 20 401 XX/FA 20 401 XXS (3) FA 60 105 02 + FA 60 003 XX/FA 60 003 XXS/FA 60 023 20/FA 60 023 20R EN 80079-36:2016 EN 80079-37:2016	
	62 KG (A) 11 KG + (B) 16 KG + (C) 35 KG	58,35 KG (A) 11 KG + (B) 12.35 KG + (C) 35 KG



Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer



Charge maxi admissible
Max. allowable load
Carga máxima admisible
Peso massimale
Zulässige Höchstlast

DIM. 

Hauteur
Height
Altura
Altezza
Höhe



Empattement base en H
H-shaped wheelbase
Distancia entre ejes de base en H
Ingombro base a H
Standbreite Basis in H

R (kN) / MBS (kN)

+ (1)

+ (2)

Résistance statique (en kN) / Résistance à la rupture
Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)

Point fort
Key feature
Ventaja principal
Punti forti
Produktvorteil

À utiliser avec
To be used with
Para usar con
Ad essere utilizzato con
Verwendet werden soll mit