




EASYSAFEWAY 2

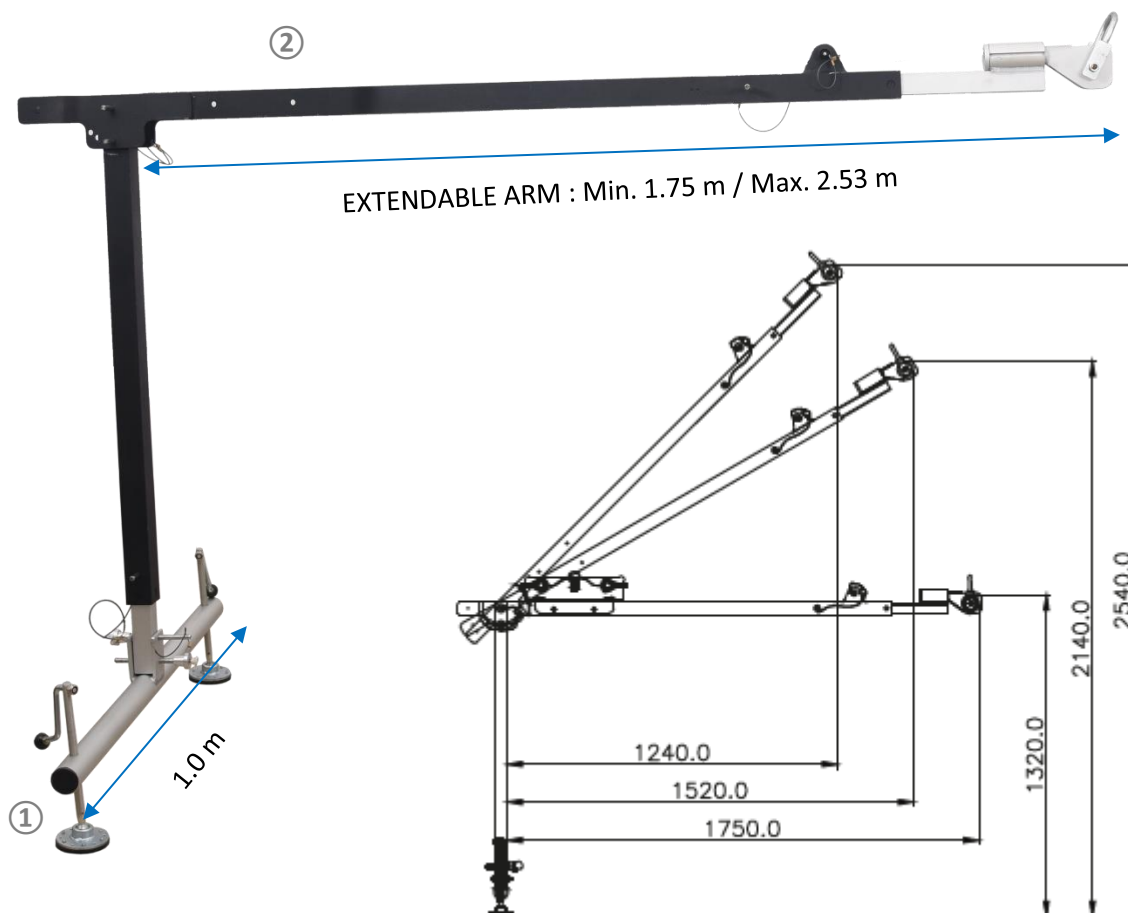



3 positions – non-extended arm

①



ADJUSTABLE SWIVEL PADS

HS CODE
76169990
CARTON SIZE / PCS.
195x48x30 cm / 1
Certificate of Test n°SPC0282742/1912 Ext. 1
Satra Technology Centre, N° 0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom

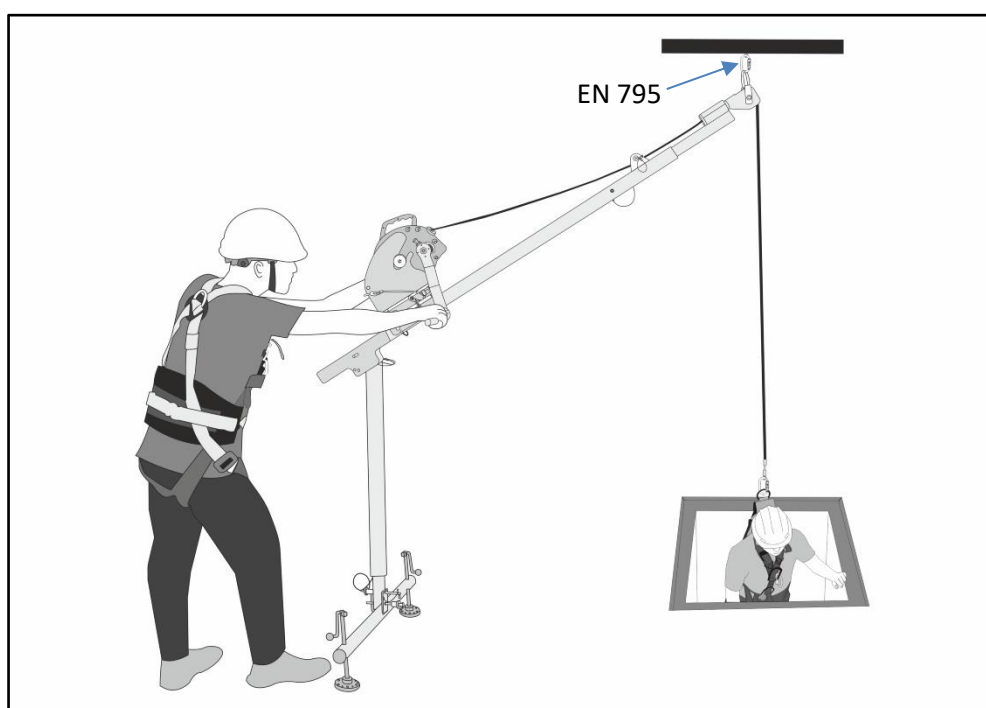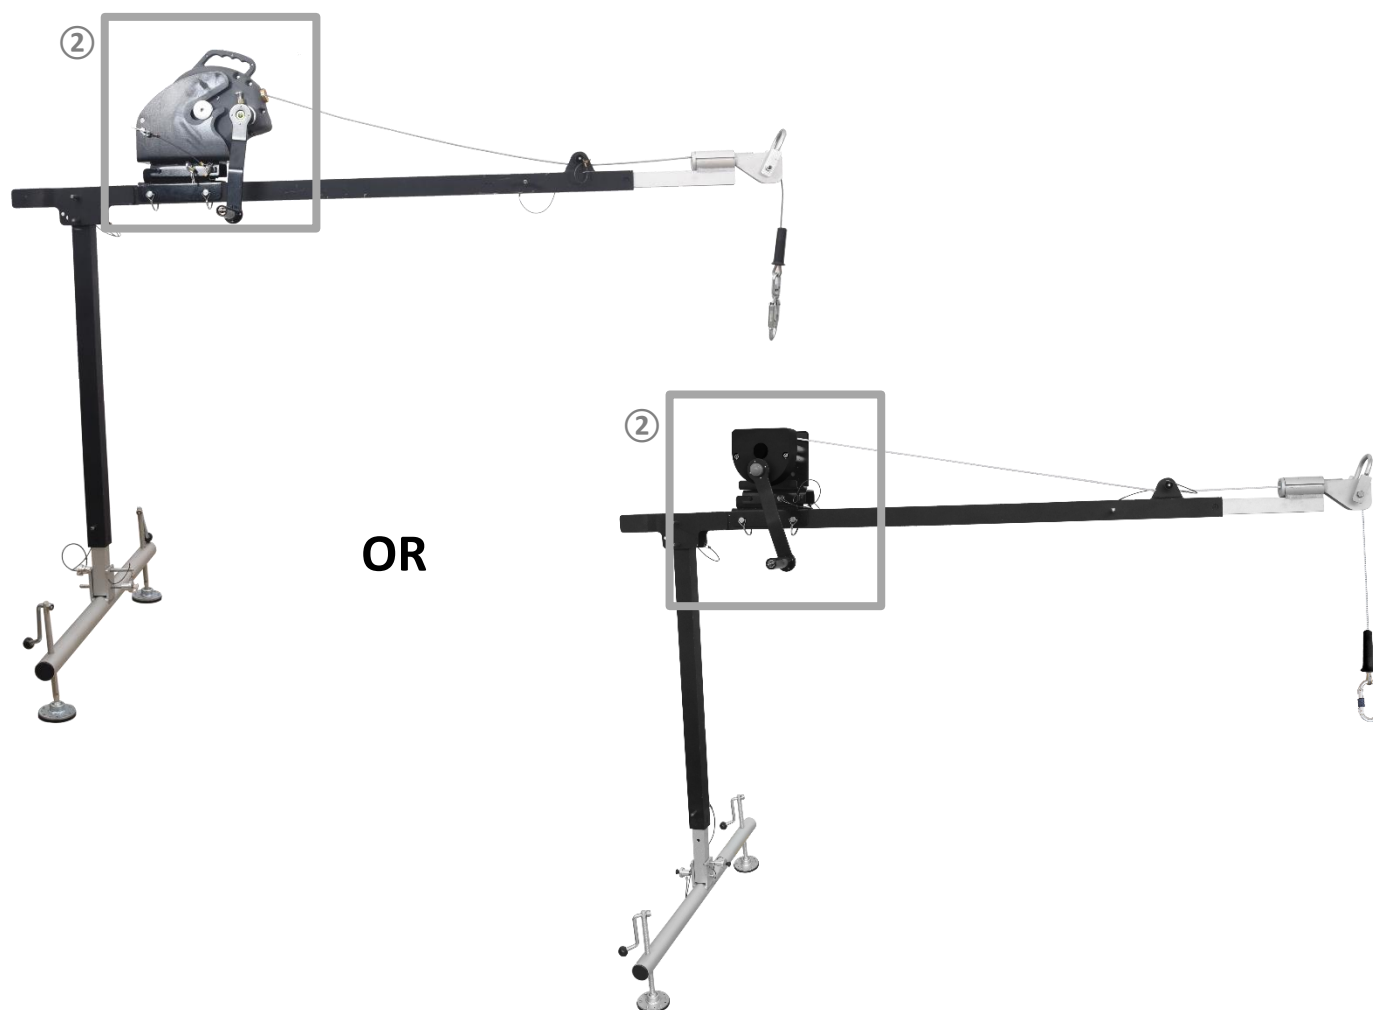

REF.	FA 60 106 00
CE	EN 795:2012 Type A
	x1
	500 KG
MAT.	
DIM. 	3 positions : Non-extended arm: 1.32 m / 2.14 m / 2.54 m Extended arm: 1.32 m / 2. 54 m / 3.14 m
R (kN) / MBS (kN)	12 kN / 15 kN
	1 m
+	(1) Machinery Directive + EN 1808 (2) FA 60 106 01 + FA 20 401 XX/FA 20 401 XXS (2) FA 60 106 02 + FA 60 003 XX/FA 60 003 XXS/FA 60 023 20/FA 60 023 20R
	13.19 KG



Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer



Charge maxi admissible
Max. allowable load
Carga máxima admisible
Peso massimale
Zulässige Höchstlast

DIM. 

Hauteur
Height
Altura
Altezza
Höhe



Diamètre de la base
Base diameter
Diámetro de la base
Diametro della base
Basisdurchmesser

R (kN) / MBS (kN)

+ (1)

+ (2)

Résistance statique (en kN) / Résistance à la rupture
Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)

Point fort
Key feature
Ventaja principal
Punti forti
Produktvorteil

À utiliser avec
To be used with
Para usar con
Ad essere utilizzato con
Verwendet werden soll mit