






FA 60 201 00


P. 1|2



IS LINE

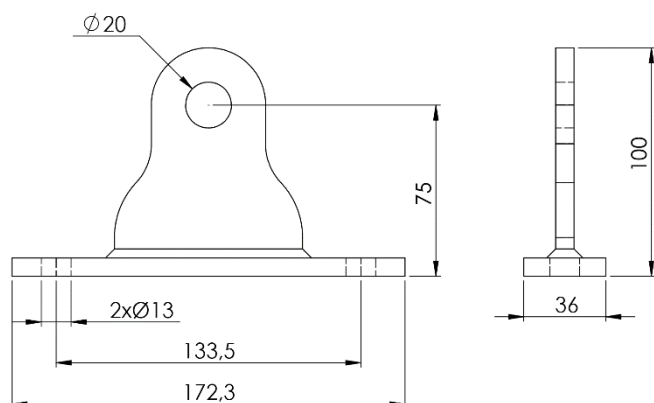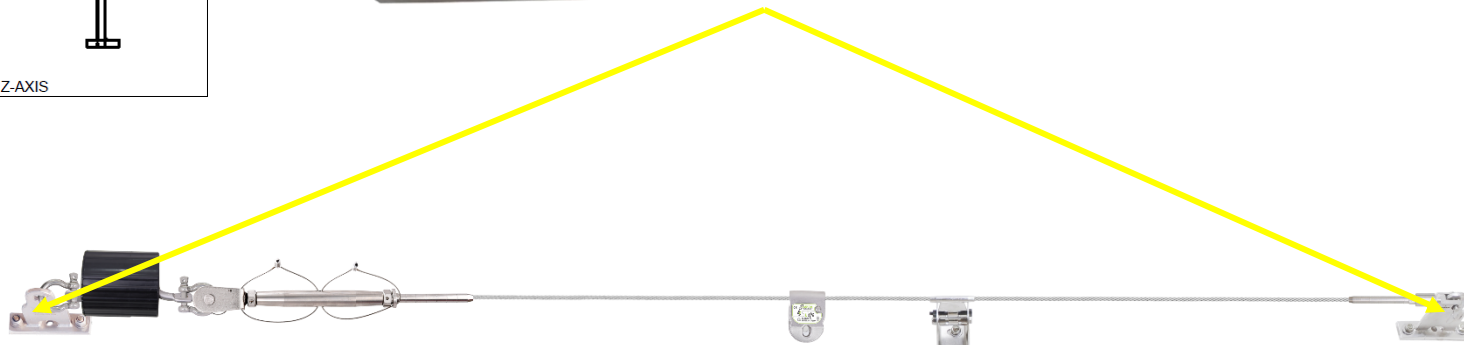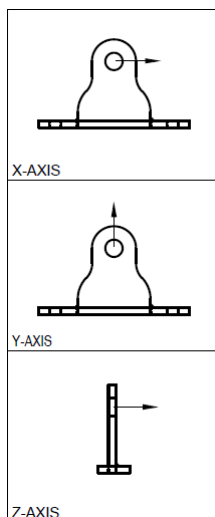

HS CODE
73269098
CARTON SIZE / PCS.
40 x 30 x 15 cm / 15
Test report 151016 (against EN795:2012 Type C) Test report 1510107 (against TS 16415:2013 Type C)
DolomitiCert Scarl N°2008 Zona Industriale Villanova 32013 LONGARONE (BL) - Italy
Technical report SPC0251999/1647 (against EN795:2012 Type A & TS 16415:2013 Type A)
Satra Technology Centre Ltd, n°0321 Wyndham Way, Telford Way, Kettering, Northamptonshire, NN16 8SD - United Kingdom
ACKNOWLEDGEMENT OF RECEIPT N°1120/1/2020 (ATEX)
Technická Inšpekcia, a.s. N°1354 Trnavská cesta 56, 821 01 Bratislava, Slovenská Republika


REF.	FA 60 201 00
CE	EN 795:2012 Type A, TS 16415:2013 Type A EN 795:2012 Type C, TS 16415:2013 Type C
	x4
MBS (kN)	45 kN
MAT.	 INOX316
DIM.	H 100 mm 172 mm x 36 mm
	2x M12
	0.68 KG



Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer

MBS

Résistance à la rupture
Minimum Breaking Strength
Resistencia a la ruptura (en kN)
Resistenza alla rottura (in kN)
Bruchfestigkeit (in kN)



Fixations à utiliser
Fasteners to use
Fijaciones que deben usarse
Elemnetti di fissaggio da utilizzare
Zu verwendende Befestigungen