

FA 60 201 02



FA 60 230 00


FA 60 204 01




FA 60 230 01

FA 60 230 00B

FA 60 216 00B

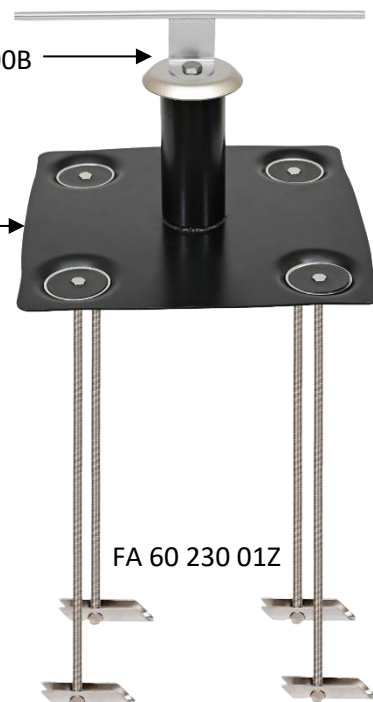


FA 60 230 01Z

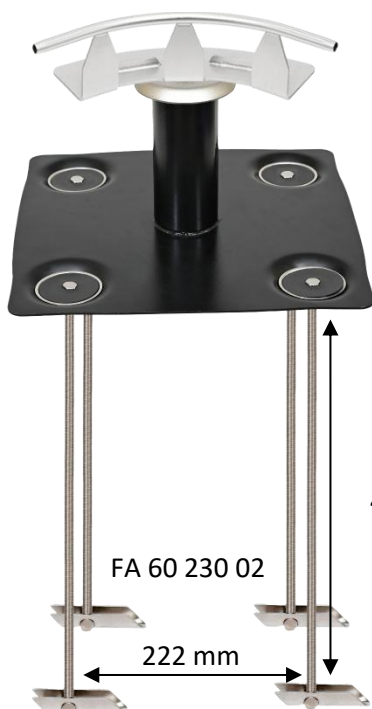


FA 60 230 02

222 mm


450 mm

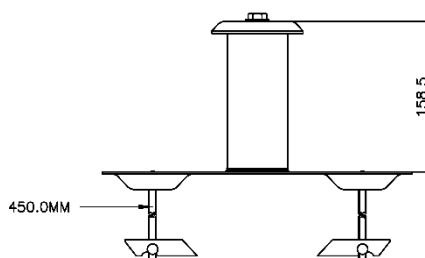

450.0MM

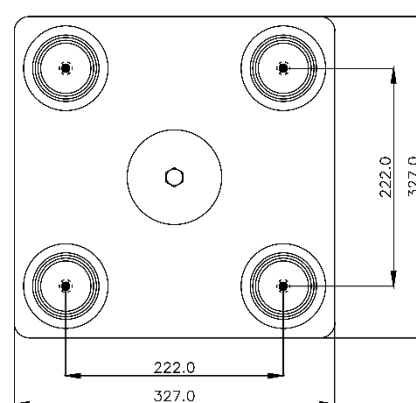

HS CODE
76199990
CARTON SIZE / PCS.
78 x 38 x 23 / 8pcs
COMPLIANCE OF CONFORMITY N° PPE 23873 AC 467 (FOR FA 60 230 00)
ANCCP Certification Agency Via dello Struggino 6 57121 Livorno (ITALY)


REF.	FA 60 230 00	FA 60 230 01	FA 60 230 01Z	FA 60 230 02
	EN 795:2012 – TS 16415:2013			
MAT.				
DIM.	H : 230 mm 327x327mm	H : 240 mm 327x327mm		
MBS (kN)	15 kN			
	Including 4 toggles			
	3.65 KG	3.40 KG	3.97 KG	3.56 KG
Sys.	☒ KS 4000 ☐ KS 4000 MAX-S			



Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer

MBS (kN)

Résistance à la rupture (en kN)
Minimum Breaking Strength (in kN)
Resistencia a la ruptura (en kN)
Resistenza alla rottura (in kN)
Bruchfestigkeit (in kN)



Fixations à utiliser / Dimensions de la structure d'accueil
Fasteners to use / Dimensions of the receiving structure
Fijaciones que deben usarse / Dimensiones de la estructura receptora
Elementi di fissaggio da utilizzare / Dimensioni della struttura ospitante
Zu verwendende Befestigungen / Abmessungen der Aufnahmestruktur

Sys.

Système compatible
Compatible system
Sistema compatibile
Sistema compatibile
Kompatibles System