





BEL LIGHTING | Bolas HP led

Item code: **8028.D01R.16**

IK10

IP68

Class
III

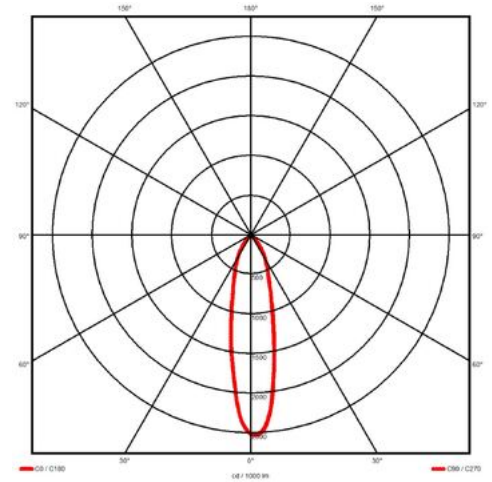

Product Description

High-performance IP68 waterproof recessed ground light supplied with a 1m cable. Available in multiple wattages and beam angles for customized effects. Operates on constant current, to use with a separate external driver (not included). Offering maximum immersion protection, it is ideal for demanding landscape and architectural lighting.

General technical data

Manufacturing material :	Body made in anodized aluminum
Surface finishing* :	Brushed stainless steel
Diffuser type :	safety extra clear glass 10mm
Fixation :	 ground - ceiling
IP Protection degree :	IP68
Shock resistance degree :	IK10
Reference temperature :	25°C
Working Environment Temperature :	-20°C > +50°C
Minimum Life time @ Ta 40°C :	85.000hrs (L80 B10)
Weight (Kg) :	0.60 Kg
Dimensions mm (L x W x H):	100 x 100 x 60 mm
Country of origin :	made in Belgium**

Reference Standards and Directives

Warranty :	3 years extendable to 5
Product certification :	CE
Certification and approval marks :	ISO 9001 - 14001 - 45001

Available accessories

Recessed box - Pop 8a/8b ref: X067A / X067B

Led driver AC/CC 350mA or 500mA CC

Led driver DC/CC (24VDC/350mA or 500mA)

Anti-glare honeycomb - Louver ref: X060.043.3

Asymmetrical beam - visor HC ref: X061.050.2

IP68 connection - Connex 2 / 3 / 4

* Please refer to the information pages for the specific characteristics of anodized surfaces.

** All light fixtures shipped from our address in Megara, Greece are made in Greece.

Lighting characteristics

Number of light sources :	1
Light source type :	Led 6W 4000K
Luminaire power :	6 W
Colour temperature :	4000 K
Colour Rendering Index :	CRI>90
Luminous flux (lumens) :	805 lm
Luminous flux efficiency :	134 lm/W
MacAdam step :	3
Beam angle ° FWHM :	15°
Lighting type :	direct
This product contains a lightsource of energyclass :	F

Electrical characteristics

Insulation Class :	Class III
Voltage / Current :	350mA
Dimmable :	Yes

Available On Request

Other cover plate dimensions (customized)

Anodized colour or brushed brass cover plate

Sandblasted glass

Other led color: 2200K / 3000K / 5000K

Other cable length (customized)

BEL LIGHTING | Bolas HP led

Item code: **8028.D01R.16**

IK10

IP68

Class
III



Others photos
from the same range

