


BEL LIGHTING | Zona X

Item code: **8084X.D30.16**

IK10

IP68

Class
III

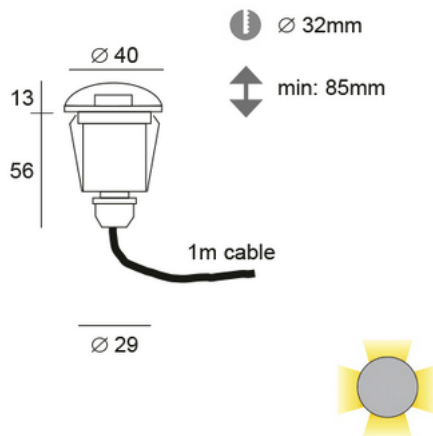

Product Description

Compact IP68 in-ground LED marker with grazing light, supplied with a 1m cable. Operates on constant current (xxxmA) with a remote 220-240V driver not included. Manufactured in 316L stainless steel or copper, it provides subtle, glare-free illumination for pathways, terraces, steps and landscape features.

General technical data

Manufacturing material :	Body made in stainless steel 316L
Surface finishing* :	Brushed stainless steel
Diffuser type :	Clear plexiglas (transparent)
Fixation :	 wall - ground
IP Protection degree :	IP68
Shock resistance degree :	IK10
Reference temperature :	25°C
Working Environment Temperature :	-20°C > +50°C
Minimum Life time @ Ta 40°C :	85.000hrs (L80 B10)
Weight (Kg) :	0.30 Kg
Dimensions mm (L x W x H):	40 x 40 x 69 mm
Country of origin :	made in Belgium**

Reference Standards and Directives

Warranty :	3 years extendable to 5
Product certification :	CE
Certification and approval marks :	ISO 9001 - 14001 - 45001

Available accessories

Recessed box - Pop 12 ref: X012

Led driver AC/CC 350mA

Led driver DC/CC (12-36VDC/350mA)

IP68 connection - Connex 2 / 3 / 4

Lighting characteristics

Number of light sources :	1
Light source type :	Led 3,2W 4000K
Luminaire power :	3.2 W
Colour temperature :	4000 K
Colour Rendering Index :	CRI>90
Luminous flux (lumens) :	395 lm
Luminous flux efficiency :	123 lm/W
MacAdam step :	3
Beam angle ° FWHM :	70°
Lighting type :	direct
This product contains a lightsource of energyclass :	

Electrical characteristics

Insulation Class :	Class III
Voltage / Current :	350mA
Dimmable :	Yes

Available On Request

Other anodized color

Other material: brushed brass

Other led color: 2200K / 3000K / 5000K

Other cable length (customized)

* Please refer to the information pages for the specific characteristics of anodized surfaces.

** All light fixtures shipped from our address in Megara, Greece are made in Greece.

BEL LIGHTING | Zona X

Item code: **8084X.D30.16**

IK10

IP68

Class
III



Others photos
from the same range

