


BEL LIGHTING | Strato

Item code: **8067.1D1.02**


IK09

IP65

Class I

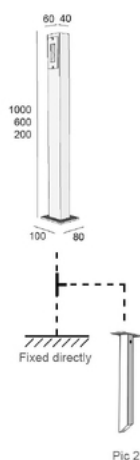

See more details accessories pages.
Voir plus de détails pages des accessoires.
Zie meer details accessoires pagina's.
Mehr Details auf den Zubehörseiten.

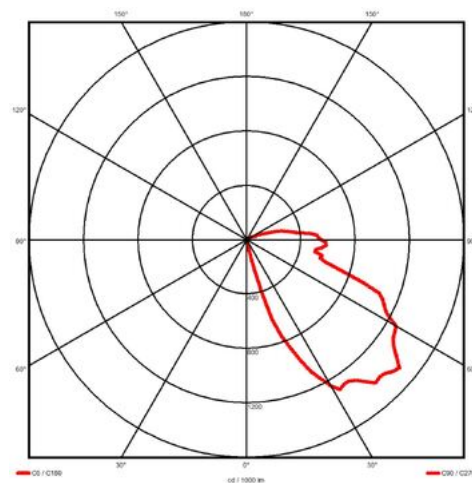

Product Description

Modern and robust bollard made of aluminum profile, its sober design gives this fixture a contemporary and timeless aesthetic. STRATO is available in 3 heights (20cm, 60cm and 100cm) and is available as standard in grey, dark grey, black or corten. Non-glare luminaire with the positioning of its LED high luminous efficiency STRATO is particularly suitable to create an atmosphere lighting, delineation and guidance for walkways, driveways or in the private sphere or public.

General technical data

Manufacturing material :	Body made in aluminum
Surface finishing* :	Black
Diffuser type :	Clear plexiglas (transparent)
Fixation :	 ground
IP Protection degree :	IP65
Shock resistance degree :	IK09
Reference temperature :	25°C
Working Environment Temperature :	-20°C > +50°C
Minimum Life time @ Ta 40°C :	85.000hrs (L80 B10)
Weight (Kg) :	0.75 Kg
Dimensions mm (L x W x H):	60 x 40 x 200 mm
Country of origin :	made in Belgium**

Reference Standards and Directives

Warranty :	3 years extendable to 5
Product certification :	CE
Certification and approval marks :	ISO 9001 - 14001 - 45001

Available accessories

- IP68 connection - Connex 2 / 4 / 6
- Anti-ant gasket - ref: GK.100X080
- Spike for ground fixing - Pic 2 ref: 803.00.02

Lighting characteristics

Number of light sources :	1
Light source type :	Led 6W 4000K
Luminaire power :	6 W
Colour temperature :	4000 K
Colour Rendering Index :	CRI>90
Luminous flux (lumens) :	805 lm
Luminous flux efficiency :	134 lm/W
MacAdam step :	3
Beam angle ° FWHM :	50°
Lighting type :	direct
This product contains a lightsource of energyclass :	F

Electrical characteristics

Insulation Class :	Class I
Voltage / Current :	220-240V / 50-60Hz
Dimmable :	Dimmable on request

Available On Request

- Other RAL colors
- Other led color: 2200K / 3000K / 5000K
- Power supply 24VDC included
- Other dimensions (customized)

* Please refer to the information pages for the specific characteristics of anodized surfaces.

** All light fixtures shipped from our address in Megara, Greece are made in Greece.

BEL LIGHTING | Strato

Item code: **8067.1D1.02**

IK09

IP65

Class I



Others photos
from the same range

